

DDC-BELL DRASS CAMERA


DESCRIPTION:

The HGU-01 Chamber and Bell Camera has been specifically designed, manufactured and tested for both internal and external diving bell installations.

The standard camera body is made of stainless steel (AISI 316 L) and can also be manufactured in titanium on request.

The working depth of the camera is assured to 300 msw, - and, on client request, can be manufactured to operate at greater depths.

The DDC Camera on its standard configuration is equipped with L036 Optical Lens and stainless steel bulkhead connector male plug-4 pins.

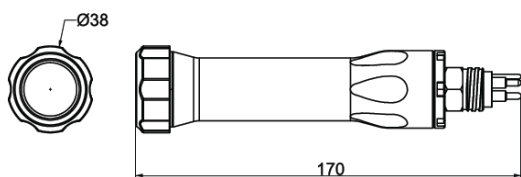

LENS CODE	CHARACTERISTICS
-----------	-----------------

L036 (standard)	3.6 mm - 75°
-----------------	--------------

CONNECTOR	MATERIAL CODE
-----------	---------------

MC-BH-4M-SS	Stainless Steel
-------------	-----------------

PIN CONFIGURATION	
-------------------	--

- | | |
|---|----------------|
| 1 | Video Output |
| 2 | Power GND |
| 3 | Power + 24 Vdc |
| 4 | Video GND |



DDC-BELL DRASS CAMERA

SPECIFICATIONS	
Material	AISI 316 L
Depth Rating	300 msw
Test pressure	450 msw
Power Supply	24 Vdc (12 Vdc Optional)
Power Consumption	140 mA
Angle of view in air	Standard > 75° (3.6 mm)

SPECIFICATIONS	
Output	Video Composite (PAL or NTSC)
Sensitivity	0.01 lux
Focus	auto
White balance	auto
TV Line	700
Dimension	38 x 170 mm



COMMERCIAL CODE	DESCRIPTION
97CE-05-01-01-00-00	Chamber and Bell Camera made of AISI 316L with PAL Video Composite, 3.6 mm - 75° Lens characteristics, and Stainless Steel bulkhead connector
97CE-05-01-02-00-00	Chamber and Bell Camera made of AISI 316L with NTSC Video Composite, 3.6 mm - 75° Lens characteristics, and Stainless Steel bulkhead connector